



YEUCHYUAN



INDUSTRIAL GLUE GUN

POWERFUL, RELIABLE, VERSATILE

Yeu Chyuan at a Glance

Yeu Chyuan Industrial Co., Ltd. is a Taiwan-based manufacturer and exporter of hot melt glue guns with more than 35 years of expertise. We supply a full spectrum of high-quality glue guns—from consumer to industrial models—delivering reliable performance at competitive prices to customers worldwide.

At YC, creativity drives innovation. We pioneered twin-shot moulding in glue gun production, introducing the distinctive Bi-color Series that quickly captured consumer attention and strengthened market presence.

As demand shifts toward greater mobility, we have expanded into battery-powered cordless glue guns, further broadening our product portfolio.

Beyond our own ranges, we work closely with global partners on OEM projects, offering not only glue guns but also an extensive selection of art and craft tools.

Partner with Yeu Chyuan—we engineer the tools, so you can focus on building your business.

Certifications



YC-750 Semi Pro Glue Gun

Model	YC-750
Glue size	Ø11mm (Ø.43")
Heater	PTC
Max temp.	210°C/410°F
Power source	Mains electricity


Market	EU
Power	25W(150W)
Voltage	110-240V
Frequency	50Hz/60Hz

Market	US
Power	150W
Voltage	120V
Frequency	60Hz

Market	Canada
Model	YC-750CUL
Power	100W
Voltage	120V
Frequency	60Hz



Compact size

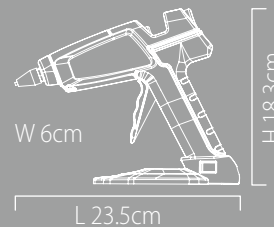

Removable stand



Double blister



YC-800 Semi Pro Glue Gun

Model	YC-800
Glue size	Ø11mm (Ø.43")
Heater	PTC
Max temp	210°C/410°F
Power source	Mains electricity

Market	EU
Power	25W(200W)
Voltage	110-240V
Frequency	50Hz/60Hz

Market	US
Power	200W
Voltage	120V
Frequency	60Hz

Market	Canada
Model	YC-800CUL
Power	100W
Voltage	120V
Frequency	60Hz



T712 Pro Glue Gun

Mode	T712
Glue size	Ø11mm (Ø.43")
Heater	PTC
Max temp	210°C/410°F
Power source	Mains electricity

Market	EU
Power	25W(250W)
Voltage	110-240V
Frequency	50Hz/60Hz

Market	US
Power	250W
Voltage	120V
Frequency	60Hz


Market	Canada
Model	T712CUL
Power	15W (Max. Inrush 300W)
Voltage	120V
Frequency	60Hz



Handy size

Retractable wire stand


Double blister

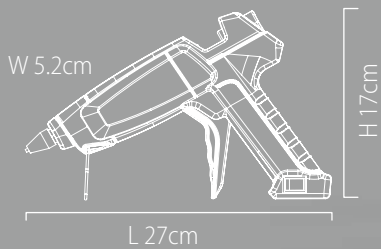

Compact size

Retractable wire stand

Double blister




T812 Pro Glue Gun

Model	T812
Glue size	Ø11mm (Ø.43")
Heater	PTC
Max temp	225°C/437°F
Power source	Mains electricity

Market	US
Power	300W
Voltage	120V
Frequency	60Hz

Market	Canada
Model	T812CUL
Power	25W (Max. Inrush 300W)
Voltage	120V
Frequency	60Hz

Market	EU
Power	37W(300W)
Voltage	110-240V
Frequency	50Hz/60Hz

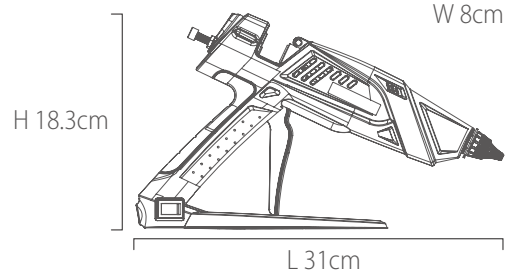


T912 Pro Glue Gun

Model	T912
Glue size	Ø11mm (Ø.43")
Heater	Cartridge heater
Max temp	200°C/392°F
Power source	Mains electricity

Market	US / Canada
Power	400W
Voltage	120V
Frequency	60Hz

Market	EU
Power	400W
Voltage	220-240V
Frequency	50Hz/60Hz

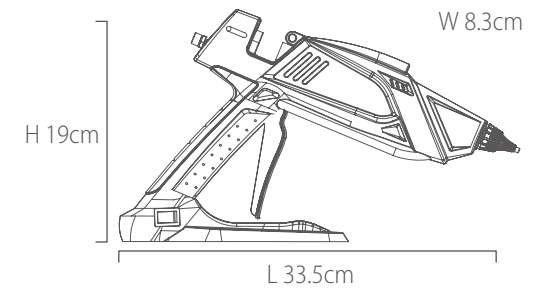

T7312 Pro Glue Gun

12mm Adjustable Temperature

Model	T7312
Glue size	Ø12mm (Ø.43")
Heater	Cartridge heater
Temp. settings	(°C) 130, 150, 170, 185, 200, 220 (°F) 266, 302, 338, 365, 392, 428
Power source	Mains electricity

Market	US/Canada
Power	300W
Voltage	120V
Frequency	60Hz

Market	EU
Power	300W
Voltage	220-240V
Frequency	50Hz/60Hz



500W

40% More Output

T7512 Pro Glue Gun

11mm Adjustable Temperature




Model	T7512
Glue size	Ø11mm (Ø.43")
Heater	Cartridge heater
Temp. settings	(°C) 130, 150, 170, 185, 200, 220 (°F) 266, 302, 338, 365, 392, 428
Power source	Mains electricity


Market	US/Canada
Power	500W
Voltage	120V
Frequency	60Hz

Market	EU
Power	500W
Voltage	220-240V
Frequency	50Hz/60Hz

Detachable stand

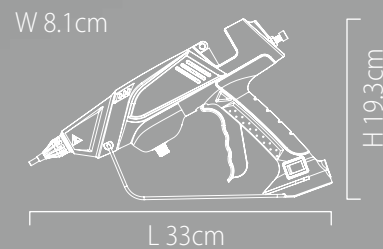

Detachable stand

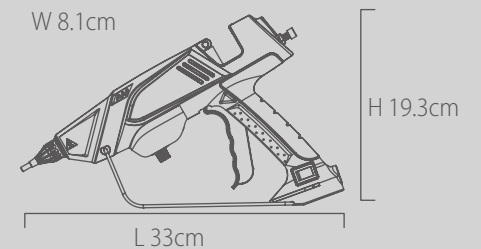

T7315 Pro Glue Gun

15mm Adjustable Temperature

Model	T7315
Glue size	Ø15mm (Ø.59")
Heater	Cartridge heater
Temp. settings	(°C) 130, 150, 170, 185, 200, 220 (°F) 266, 302, 338, 365, 392, 428
Power source	Mains electricity

Market	US/Canada
Power	300W
Voltage	120V
Frequency	60Hz

Market	EU
Power	300W
Voltage	220-240V
Frequency	50Hz/60Hz



500W

40% More Output

T7515 Pro Glue Gun



15mm Adjustable Temperature



Model	T7515
Glue size	Ø15mm (Ø.59")
Heater	Cartridge heater
Temp. settings	(°C) 130, 150, 170, 185, 200, 220 (°F) 266, 302, 338, 365, 392, 428
Power source	Mains electricity

Market	US/Canada
Power	500W
Voltage	120V
Frequency	60Hz

Market	EU
Power	500W
Voltage	220-240V
Frequency	50Hz/60Hz

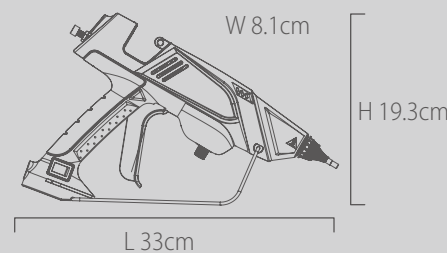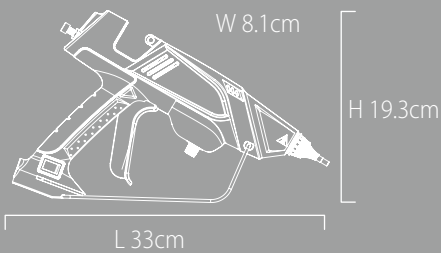

Nozzle Series



Standard nozzle F5-2
 Overall size 12.7x30.8mm
 Opening size Ø1.8mm
 Thread size 7/16" 20UNF



Standard nozzle F5-9
 Overall size 12.7x43.1mm
 Opening size Ø3mm
 Thread size 7/16" 20UNF



Flat nozzle F5-3
 Overall size 12.7x41mm
 Opening size 3.5x1.5mm
 Thread size 7/16" 20UNF



Flat nozzle F5-10
 Overall size 12.7x44mm
 Opening size 3.5x1.4mm
 Thread size 7/16" 20UNF



Standard nozzle F5-4
 Overall size 12x35.5mm
 Opening size Ø2.3mm
 Thread size 7/16" 20UNF



Angle cut nozzle F5-11
 Overall size 12.7x48.3mm
 Opening size Ø3mm
 Thread size 7/16" 20UNF



Standard nozzle F5-5
 Overall size 12.7x39mm
 Opening size Ø2.5mm
 Thread size 7/16" 20UNF



Precision nozzle F5-12
 Overall size 12.7x41mm
 Opening size Ø1.5mm
 Thread size 7/16" 20UNF



Precision nozzle F5-6
 Overall size 12x41mm
 Opening size Ø1.5mm
 Thread size 7/16" 20UNF



Angle cut nozzle F5-13
 Overall size 12.7x45mm
 Opening size 3mm
 Thread size 7/16" 20UNF



Angle cut nozzle F5-7
 Overall size 12x45mm
 Opening size 3mm
 Thread size 7/16" 20UNF



Wide 6-hole spreader nozzle F5-14
 Overall size 20.7x12.8x30mm
 Opening size Ø1.3mm each
 Thread size 7/16" 20UNF



Flat nozzle F5-8
 Overall size 12x41mm
 Opening size 3.5x1.5mm
 Thread size 7/16" 20UNF



Standard nozzle F5-15
 Overall size 12.7x52.5mm
 Opening size Ø3.5mm
 Thread size 7/16" 20UNF

Nozzle Series

With slot →



Standard nozzle F5-15-2
 Overall size 12.7x52.5mm
 Opening size Ø3.5mm
 Thread size 7/16" 20UNF



Skirting nozzle F5-23
 Overall size 21.1x71.8mm
 Opening size 5.5x1.4mm
 Thread size 7/16" 20UNF



Standard nozzle F5-16
 Overall size 12x40.5mm
 Opening size Ø2.5mm
 Thread size 7/16" 20UNF



Extension precision nozzle F5-24
 Overall size 12.7x54.1mm
 Opening size Ø2.7mm
 Thread size 7/16" 20UNF



Standard nozzle F5-17
 Overall size 12.7x32.5mm
 Opening size Ø2.5mm
 Thread size 7/16" 20UNF



Standard nozzle F5-25
 Overall size 12.8x46mm
 Opening size Ø3mm
 Thread size 7/16" 20UNF

With slot →



Extended nozzle F5-18
 Overall size 12.7x58.3mm
 Opening size Ø4mm
 Thread size 7/16" 20UNF



5-hole spreader nozzle F5-19
 Overall size 19.2x12.9x33.6mm
 Opening size Ø1.1mm each
 Thread size 7/16" 20UNF



Precision nozzle F5-20
 Overall size 12.6x43.2mm
 Opening size Ø1.5mm
 Thread size 7/16" 20UNF



Standard nozzle F5-21
 Overall size 12.7x38.8mm
 Opening size Ø3mm
 Thread size 7/16" 20UNF



Contact

1F., No. 189-9, Liuzilin, Liuxiang Vil.,
Shuishang Township, Chiayi County 60853,
Taiwan (R.O.C.)
Phone: +886 5-268-7550
Fax: +886 5-268-1110

yc@yeuchyuan.com www.yeuchyuan.com.tw

