



YEUCHYUAN



GLUE GUNS & TOOLS

SMART. SMOOTH. SOLID

01

Bi-color Glue Guns

06

Mini Glue Guns

12

Regular Glue Guns

20

Accessories

24

Art & Craft Tools

Yeu Chyuan at a Glance

Yeu Chyuan Industrial Co., Ltd. is a Taiwan-based manufacturer and exporter of hot melt glue guns with more than 35 years of expertise. We supply a full spectrum of high-quality glue guns—from consumer to industrial models—delivering reliable performance at competitive prices to customers worldwide.

At YC, creativity drives innovation. We pioneered twin-shot moulding in glue gun production, introducing the distinctive Bi-color Series that quickly captured consumer attention and strengthened market presence.

As demand shifts toward greater mobility, we have expanded into battery-powered cordless glue guns, further broadening our product portfolio.

Beyond our own ranges, we work closely with global partners on OEM projects, offering not only glue guns but also an extensive selection of art and craft tools.

Partner with Yeu Chyuan—we engineer the tools, so you can focus on building your business.

Certifications



BI-COLOR GLUE GUNS

Bold, vibrant, and made to stand out.



Patented



A200 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (A200CUL)	10W 120V
EU	7W(25W) 110-240V



Patented



A300 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (A300CUL)	10W 120V
EU	7W(25W) 110-240V



Patented



Multiversions



A500 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada (A500CUL)	25W 120V
EU	15W(70W) 110-240V
Other versions	



Ref. code A500D
Dual Temp. Switch



Ref. code A500-I
On/Off Switch



Ref. code A520
Interchangeable
Nozzle
Refer to Page 21



Patented



Multiversions



A600 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada (A600CUL)	25W 120V
EU	15W(70W) 110-240V
Other versions	



Ref. code A600D
Dual Temp. Switch



Ref. code A600-I
On/Off Switch



Ref. code A620
Interchangeable
Nozzle
Refer to Page 21



Patented



Detachable



T1607 Mini Glue Gun

Specification

Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	180°C/356°F
Cool melt only	150°C/302°F

Market

US	15W 120V
Canada (T1607CUL)	7W (Max. Inrush 38W) 120V
EU	7W(25W) 110-240V



Patented



PA-8172Z Mini Glue Gun

Specification

Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	180°C/356°F
Cool melt only	150°C/302°F

Market

US	15W 120V
Canada (PA-8172ZCUL)	7W (Max. Inrush 38W) 120V
EU	7W(25W) 110-240V



Patented



Multiversions



Detachable



T1612 Glue Gun

Specification

Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	190°C/374°F
Cool melt only	150°C/302°F

Market

US	40W 120V
Canada (T1612CUL)	12W(Max. Inrush 52 W) 120V
EU	12W(70W) 110-240V

Other versions



Ref. code T1612D
Dual Temp. Switch



Ref. code T1612-I
On/Off Switch



Ref. code T1620
Interchangeable
Nozzle
Refer to Page 21

12 Stick Glue Gun Combo Set



10 Stick Glue Gun Combo Set



10 Stick Glue Gun Combo Set

MINI GLUE GUNS

Small size. Big creativity.



Patented



B200 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (B200CUL)	10W 120V
EU (A200)	7W(25W) 110-240V



Patented



B300 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (B300CUL)	10W 120V
EU (A300)	7W(25W) 110-240V



Patented



T307 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (T307CUL)	10W 120V
EU	7W(25W) 110-240V



AC-160 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (AC-160CUL)	10W 120V
EU	7W(25W) 110-240V



AC-180 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	25W 120V
Canada (AC-180CUL)	10W 120V
EU	7W(25W) 110-240V



EC-280 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (EC-280CUL)	10W 120V
EU	7W(25W) 110-240V



EC-301 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	15W 120V
Canada (EC-301CUL)	10W 120V
EU	7W(25W) 110-240V



YC-280 Mini Glue Gun

Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	10W 120V
Canada (YC-280CUL)	10W 120V
EU	7W(25W) 110-240V



Cordless



EC-301C Cordless Mini Gun


Specification	
Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	180°C/356°F
Cool melt only	150°C/302°F
Market	
US	15W 120V
Canada (EC-301CCUL)	10W 120V
EU	7W(25W) 110-240V



Thermochromic



On/Off Switch

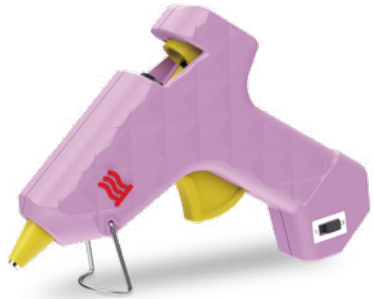

PA-8171-I Mini Glue Gun

Specification

Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	180°C/356°F
Cool melt only	150°C/302°F

Market

US (PA-8171)	15W 120V
Canada (PA-8171CUL)	10W (Max. Inrush 25 W) 120V
EU	7W(25W) 110-240V



Thermochromic



Dual Temp.



PA-8171D Dual Temp. Mini Gun

Specification

Glue size	Ø7mm (Ø.28")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	180°C/356°F
Cool melt only	150°C/302°F

Market

US	15W 120V
Canada (PA-8171DCUL)	15W(Max. Inrush 25 W) 120V
EU (PA-8171)	7W(25W) 110-240V



REGULAR GLUE GUNS

Reliable performance for every project.



AC-250 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada (AC-250CUL)	40W 120V
EU	15W(60W) 110-240V



EC-360 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US/Canada	40W 120V
EU	15W(70W) 110-240V

YC-360 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada (YC-360CUL)	40W 120V
EU	15W(70W) 110-240V



Multiversions



AC-380 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada (AC-380CUL)	40W 120V
EU	15W(70W) 110-240V
Other versions	



Ref. code AC-380NL
Without Indicator Light



Patented

T512 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada (T512CUL)	40W 120V
EU	12W(70W) 110-240V



Multiversions



EC-501 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	40W 120V
Canada	N/A
EU	15W(70W) 110-240V

AC-760 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	165°C/329°F
Market	
US	80W 120V
Canada (AC-760CUL)	40W 120V
EU	20W(80W) 110-240V



 On/Off Switch
  Detachable






YC-710 Glue Gun


Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Market	
US	100W 120V
Canada (YC-710CUL)	60W 120V
EU	20W(100W) 110-240V

T612 Glue Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	165°C/329°F
Market	
US	80W 120V
Canada (T612CUL)	40W 120V
EU	20W(100W) 110-240V



 Multiversions
  Cordless
  Dual Temp.

 Palm trigger



AC-730DC Cordless Dual Temp. Gun

Specification	
Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister
Temperature options	
Hot melt only	190°C/374°F
Cool melt only	150°C/302°F
Market	
US	80W 120V
Canada (AC-730DCUL)	40W 120V
EU (AC-730C)	20W(80W) 110-240V
Other versions	



Ref. code
AC-730
Corded

Ref. code
AC-730C
Cordless

Ref. code
AC-730D
Dual Temp.



Dual Temp.

DT-360 Dual Temp. Glue Gun

Specification

Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	190°C/374°F
Cool melt only	150°C/302°F

Market

US	60W 120V
Canada (DT-360CUL)	40W 120V
EU (AC-250)	15W(60W) 110-240V



Cordless

AC-380C Cordless Glue Gun

Specification

Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	190°C/374°F
Cool melt only	150°C/302°F

Market

US	40W 120V
Canada	N/A
EU (AC-380)	15W(70W) 110-240V

Other versions



Ref. code AC-380CB-NL
Without Indicator Light



AC-250-I On/Off Switch Glue Gun

Specification

Glue size	Ø11mm (Ø.43")
Heater	PTC
Power source	Mains electricity
Packaging	Double blister

Temperature options

Hot melt only	190°C/374°F
---------------	-------------

Market

US	40W 120V
Canada (AC-250-ICUL)	40W 120V
EU	15W(60W) 110-240V



On/Off Switch

Nozzle Collection



Standard nozzle F5-2
Overall size 12.7x30.8mm
Opening size Ø1.8mm
Thread size 7/16" 20UNF



Precision nozzle F5-12
Overall size 12.7x41mm
Opening size Ø1.5mm
Thread size 7/16" 20UNF



Flat nozzle F5-3
Overall size 12.7x41mm
Opening size 3.5x1.5mm
Thread size 7/16" 20UNF



Angle cut nozzle F5-13
Overall size 12.7x45mm
Opening size 3mm
Thread size 7/16" 20UNF



Standard nozzle F5-4
Overall size 12x35.5mm
Opening size Ø2.3mm
Thread size 7/16" 20UNF



Standard nozzle F5-16
Overall size 12x40.5mm
Opening size Ø2.5mm
Thread size 7/16" 20UNF



Standard nozzle F5-5
Overall size 12.7x39mm
Opening size Ø2.5mm
Thread size 7/16" 20UNF



Precision nozzle F5-6
Overall size 12x41mm
Opening size Ø1.5mm
Thread size 7/16" 20UNF



Angle cut nozzle F5-7
Overall size 12x45mm
Opening size 3mm
Thread size 7/16" 20UNF



Flat nozzle F5-8
Overall size 12x41mm
Opening size 3.5x1.5mm
Thread size 7/16" 20UNF

ACCESSORIES

Essential add-ons for effortless bonding.



EC-401 Mini Glue Stick

Specification	
Glue size	Ø7mm (Ø.28")
Length	100mm (4")
Color	Transparent
Quantity	12PCS
Packaging	Slide card
Packing	144 cards/CTN/ 0.031CBM/10kgs



EC-601 Glue Stick

Specification	
Glue size	Ø11mm (Ø.43")
Length	100mm (4")
Color	Transparent
Quantity	6PCS
Packaging	Slide card
Packing	144 cards/CTN/ 0.037CBM/11kgs



EC-401BAG Mini Glue Stick

Specification	
Glue size	Ø7mm (Ø.28")
Length	100mm (4")
Color	Transparent
Quantity	10PCS
Packaging	Polybag
Packing	200 bags/CTN/ 0.025CBM/10kgs



EC-601BAG Glue Stick

Specification	
Glue size	Ø11mm (Ø.43")
Length	100mm (4")
Color	Transparent
Quantity	10PCS
Packaging	Polybag
Packing	80 bags/CTN/ 0.028CBM/9kgs



EC-401-CBAG Mini Glitter Stick

Specification	
Glue size	Ø7mm (Ø.28")
Length	100mm (4")
Color	Gold and Silver
Quantity	5PCS of each color
Packaging	Polybag
Packing	200 bags/CTN/ 0.025CBM/9kgs



Glue Pad

Specification	
Material	Silicone
Color	Translucent white
Available dimensions	
	200*200*2 mm
	190*190*1.6 mm
	150*150*1 mm
	100*100*1 mm

ART & CRAFT TOOLS

Embossing, wood burning & hot-fix tools
for effortless creativity.



Patented



On/Off Switch



HG603 Embossing Heat Gun

Specification

Power source	Mains electricity
Packaging	Double blister
Temperature	330°C/626°F

Market

US	320W 120V 60Hz
Canada	320W 120V 60Hz
EU	300W 230V 50Hz/60Hz

Other versions



Ref. code HG603S
With Over-heat Protection Fuse



Patented



Dual Temp.



HG603D Dual Temp. Heat Gun

Specification

Power source	Mains electricity
Packaging	Double blister
Temperature	

High temp	300°C/572°F
Low temp	200°C/392°F

Market

US	350W 120V 60Hz
Canada	350W 120V 60Hz
EU	150W/300W 230V 50Hz/60Hz



On/Off Switch



HG-300 Embossing Heat Gun

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	330°C/626°F
Market	
US	320W 120V 60Hz
Canada	320W 120V 60Hz
EU	300W 230V 50Hz/60Hz



On/Off Switch



HG-600 Embossing Heat Gun

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	330°C/626°F
Market	
US	300W 120V 60Hz
Canada	N/A
EU	300W 230V 50Hz/60Hz



Dual Temp.



HG-300D Dual Temp. Heat Gun

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	
High temp	300°C/572°F
Low temp	200°C/392°F
Market	
US	350W 120V 60Hz
Canada	350W 120V 60Hz
EU	150W/300W 230V 50Hz/60Hz



Dual Temp.



HG-600D Dual Temp. Heat Gun

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	
High temp	300°C/572°F
Low temp	200°C/392°F
Market	
US	300W 120V 60Hz
Canada	N/A
EU	150W/300W 230V 50Hz/60Hz



SP-100 Woodburning Tool

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	650°C/1202°F
Market	
US	30W 120V 60Hz
Canada (SP-200)	30W 120V 60Hz
EU	30W 220V-240V 50Hz/60Hz



More tip set
Refer to Page 31



Patented



SP-758 Woodburning Tool

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	650°C/1202°F
Market	
US	30W 120V 60Hz
Canada (SP-758CUL)	30W 120V 60Hz
EU	30W 220V-240V 50Hz/60Hz



More tip set
Refer to Page 31



SP-160 Leather Heat Stamper

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	450°C/842°F
Market	
US	15W 120V 60Hz
Canada	N/A
EU	N/A



More tip set
Refer to Page 31 & 32



Patented



SP-757 Leather Heat Stamper

Specification	
Power source	Mains electricity
Packaging	Double blister
Temperature	450°C/842°F
Market	
US	15W 120V 60Hz
Canada (SP-757CUL)	15W 120V 60Hz
EU	15W 220V-240V 50Hz/60Hz



More tip set
Refer to Page 31 & 32



On/Off Switch



HF-100S Hotfix Applicator Wand


Specification

Power source Mains electricity
 Packaging Double blister
 Temperature 200°C/392°F

Market

US/Canada 5.6W | 120V | 60Hz
 EU N/A

Standard tip set



More tip set

Refer to Page 32

HF-100 Hotfix Applicator Wand

Specification

Power source Mains electricity
 Packaging Double blister
 Temperature 200°C/392°F

Market

US/Canada 5.6W | 120V | 60Hz
 EU N/A

Standard tip set




More tip set

Refer to Page 32



Woodburning & Soldering Tips

For SP series

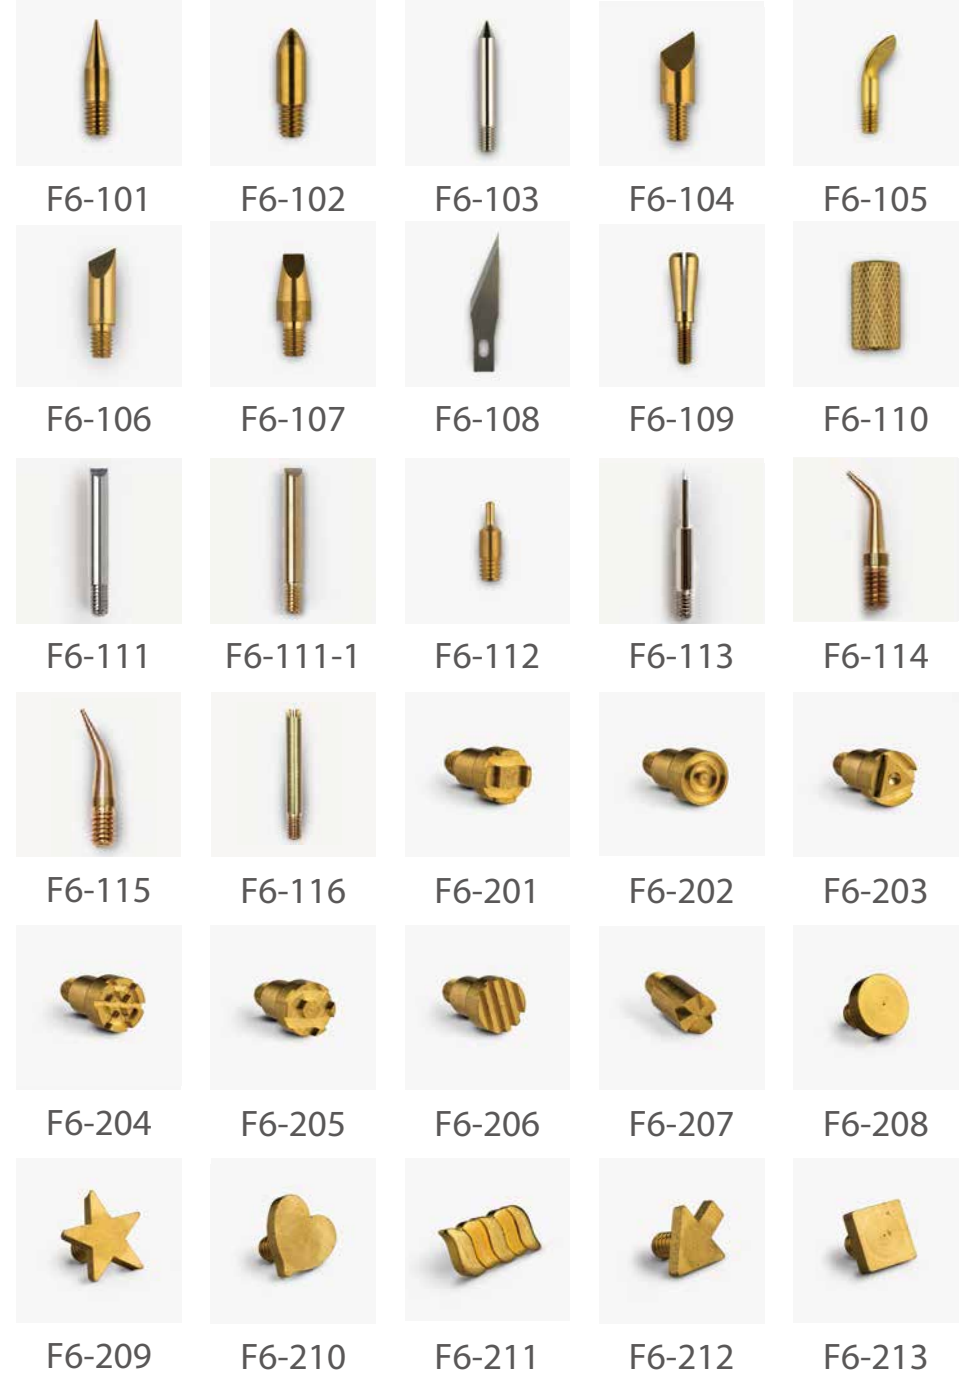

Woodburning & Soldering Tips

For SP series



F6-214



F6-215




F6-216



F6-217



F6-218



F6-219




F6-220



F6-221

Hotfix Tips


For HF series



F6-301
Hot spot




F6-302
2mm/6ss



F6-303
3mm/10ss



F6-304
4mm/16ss



F6-305
5mm/20ss



F6-306
Trowel



F6-307
7mm/34ss



F6-308
9mm Flat



F6-309
6mm/30ss



F6-310
19mm Flat



Contact

1F., No. 189-9, Liuzilin, Liuxiang Vil.,
Shuishang Township, Chiayi County 60853,
Taiwan (R.O.C.)

Phone: +886 5-268-7550

Fax: +886 5-268-1110

yc@yeuchyuan.com www.yeuchyuan.com.tw

